


## Polyart Laser

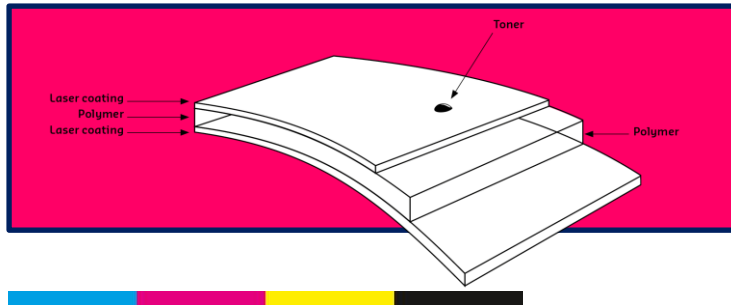

- White opaque PET base film
- High performance matt clay coating on both sides
- Anti-static treatment

Property	Method	Units	Typical values		
Weight	ISO 536	g/m <sup>2</sup>	190	261	368
Thickness	ISO 534	µm	145	195	270
Density		g/cm <sup>3</sup>	1.31	1.34	1.36
Brightness	ISO 2410-2	%	96	96	96
Opacity	ISO 2471	%	96	98	99
Tensile strength	ISO 527-3	N/mm <sup>2</sup>			
			MD	118	123
	TD	127	132	127	
Elongation @ break (min)	ISO 527-3	%			
			MD	100	100
	TD	80	80	80	

*Advice in this document is based on practical field experience and given in good faith but Arjobex, the manufacturer of Polyart synthetic papers, may not be held liable for loss or damage arising from action based on this information.*

### BENEFITS

- Unique touch, feels like paper
- Matt finish to enhance clarity of colours
- Excellent print reproduction
- Excellent toner adhesion
- Optimum press runnability
- Water and tear resistant