


Polyart.®

— the synthetic paper —

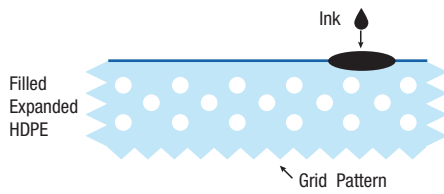

Polyart. IML 115 HD

- HDPE voided film
- Simultaneous biaxial orientation
- Heat reactive adhesive layer
- Grid pattern to avoid blisters

Property	Method	Units	Target
Thickness	ISO 534:2005	Mils Microns	4.5 114
Weight	ISO 536:1995	g/m ²	80
Density	ISO 534:2005	g/cm ³	0.7
Whiteness	TAPPI 1216 SP-07	%	90
Opacity	ISO 2471:2008	%	92
Gloss	ASTM D523-89	%	12
Surface Resistivity	ASTM D-257	Ω/□	<10 ¹⁴
Dyne Level	ASTM D2578-09	dynes/cm	>42

Advice in this document is based on practical field experience and is given in good faith but Arjobex, the manufacturer of Polyart synthetic papers, may not be held liable for loss or damage arising from action based on this information. Arjobex recommends all qualifications be conducted with our technical team.

