


Polyart®

— the synthetic paper —

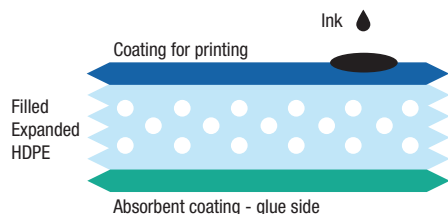

Polyart Wet Glue

- 3 layered HDPE film
- Cavitated core (density = 0.59 g/cm³)
- Glue receptive coating
- For wet glue cut & stack labels

Property	Method	Units	Value
Weight	ISO 536	g/m ²	70
Thickness	DIN 53370	µm	119
Density		g/cm ³	0.59
Whiteness	ISO 2470	%	90
Opacity	DIN 53146	%	93
Tensile Strength	ISO 527-3	N/mm ²	
MD			26
TD			26
Elongation	ISO 527-3	%	
MD			80
TD			65
Tear Strength	ASTM D1004-66	N/mm	
MD			36
TD			45

Features

- Special wet glue receptive coating
- Print easily by sheet fed offset litho
- Aspect and feel of high quality matt coated paper
- Water and moisture resistant
- Die-cuts extremely well
- Converting and die-cutting similar to paper

Advice in this document is based on practical field experience and is given in good faith but Arjobex, the manufacturer of Polyart synthetic papers, may not be held liable for loss or damage arising from action based on this information. Arjobex recommends all qualifications be conducted with our technical team.

