


# ARJOBEX

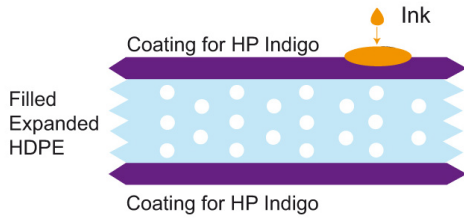

## Polyart for HP Indigo 124 GSM C2S

- HDPE voided film
- Simultaneous biaxial orientation
- Coated two sides for HP Indigo

PROPERTY	TEST METHOD	UNITS	TYPICAL DATA VALUES
Thickness	ISO 536	Mils	6.7
		Microns	170
Weight	DIN 53370	g/m <sup>2</sup>	124
		lbs: 500 sheets-25"x38"	84
Density		g/m <sup>2</sup>	0.73
Whiteness	ISO 2470	%	90
Opacity	DIN 53146	%	97
Tensile Strength	ISO 527-3	N/mm <sup>2</sup>	MD: 44 TD: 36
Elongation	ISO 527-3	%	MD: 130 TD: 115
Tear Strength	ASTM: D1004-66	N/mm	MD: 80 TD: 129
Stiffness (Gurley)	TAPPI T543	mg	MD: 200 TD: 189

## Features and Benefits

- Certified on HP Indigo sheet and roll digital presses series 2, 3, & 4
- Ready to use off the shelf—no need to use a primer
- Resistant to tears, water, grease and many chemicals
- Perfect film choice for tight project deadlines
- Can be folded, scored and die cut easily
- No grain direction
- No static issues
- High dimensional stability
- Semi-matte, smooth high-quality feel
- Recyclable with other polyolefins

The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, suitability, accuracy, reliability, or completeness of this information or the products, materials, or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage, or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. There is no endorsement of any product or process, and we expressly disclaim any contrary information.