




MAIN ATTRIBUTES:

- PET based film
- Coated two sides for dry toner printing
- Unique touch, feels like paper
- High dimensional stability
- Anti-stat coating/optimizes press runs

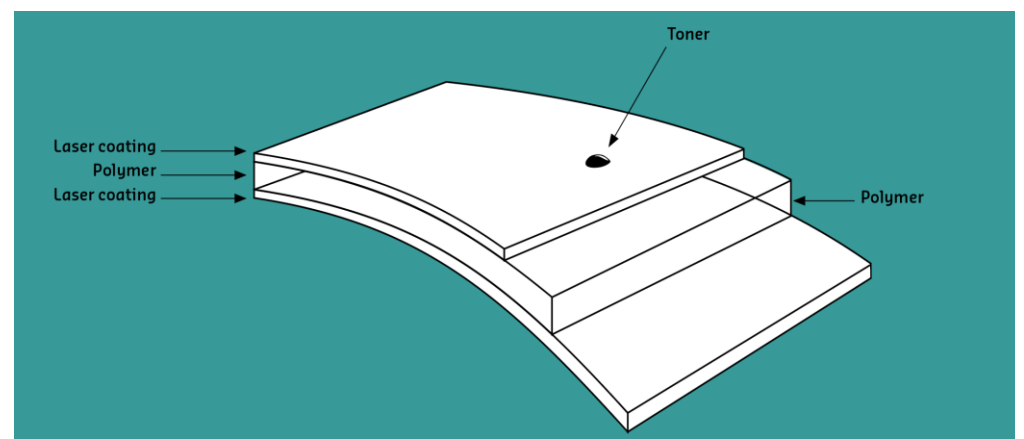

Property	Method	Units	Typical values
Thickness	ISO 536	Mils	3.8
		Microns	95
Weight	DIN 534	g/m ²	118
		Lbs: 500 sheets – 25"x38"	80
Density		g/cm ³	1.24
Whiteness	ISO 2470	%	96
Opacity	ISO 2471	%	94
Tensile strength	ISO 527-3	MD	108
		TD	116
Elongation @ break	ISO 527-3	MD	100
		TD	80
Tear Strength	ISO 34-1- Method B-no initiation		171
			144



FEATURES AND BENEFITS:

- Matte finish enhances clarity and vibrancy of colors
- Resistant to tears, water, grease and many chemicals
- Great opacity for duplex printing
- Excellent print reproduction on leading dry toner presses
- Excellent toner anchorage
- Optimum press runnability
- No need for lamination
- Writable

The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, suitability, accuracy, reliability, or completeness of this information or the products, materials, or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage, or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. There is no endorsement of any product or process, and we expressly disclaim any contrary information.