




## MAIN ATTRIBUTES:

- Clay coated two sides
- Highly cavitated & filled HDPE film
- Simultaneous biaxial orientation

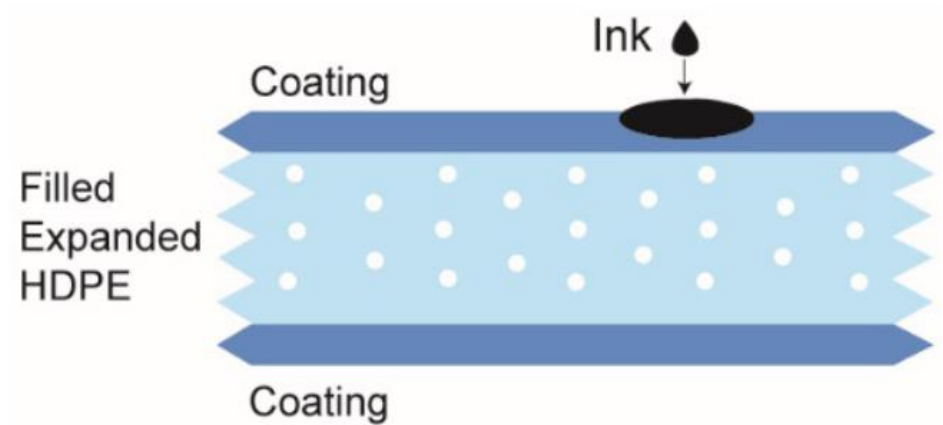

Property	Test method	Units	Typical values
<b>Thickness</b>	ASTM: D645-92	Mils	<b>3.8</b>
		Microns	<b>97</b>
<b>Weight</b>	ASTM: D646-92 (95)	g/m <sup>2</sup>	<b>75</b>
		Lbs: 500 sheets -25"x38"	<b>51</b>
<b>Density</b>		g/cm <sup>3</sup>	<b>0.79</b>
<b>Whiteness</b>	ISO 2470	%	<b>90</b>
<b>Opacity</b>	ASTM: D589-94	%	<b>92</b>
<b>Gloss</b>	ASTM: D523-89	%	<b>12</b>
<b>Tensile strength</b>	ASTM: D638-95	MD	<b>6525</b>
		TD	<b>5075</b>
<b>Elongation</b>	ASTM: D638-95	MD	<b>110</b>
		TD	<b>100</b>
<b>Tear strength</b>	ASTM: 1004-66	MD	<b>540</b>
		TD	<b>570</b>
<b>Stiffness (Gurley)</b>	TAPPI T543	Mg	<b>70</b>
<b>Fold 180</b>		Times	<b>&gt;5x10<sup>4</sup></b>
<b>Surface Resistivity</b>	ASTM: D-257	Ω/□	<b>&lt;10<sup>14</sup></b>



## FEATURES AND BENEFITS:

- Recommended for coating with hot melt adhesives
- Best thermal transfer printability for permanent self-adhesive labels
- Great dimensional stability
- Highly conformable, no grain direction
- Good stiffness allows excellent label dispensing
- Film withstands frozen/cryogenic temps when combined with appropriate adhesive

The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, suitability, accuracy, reliability, or completeness of this information or the products, materials, or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage, or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. There is no endorsement of any product or process, and we expressly disclaim any contrary information.