




MAIN ATTRIBUTES:

- Printable skin layer
- Filled HDPE film
- Cavitated core (density = 0.7 g/cm³)
- Simultaneous biaxial orientation

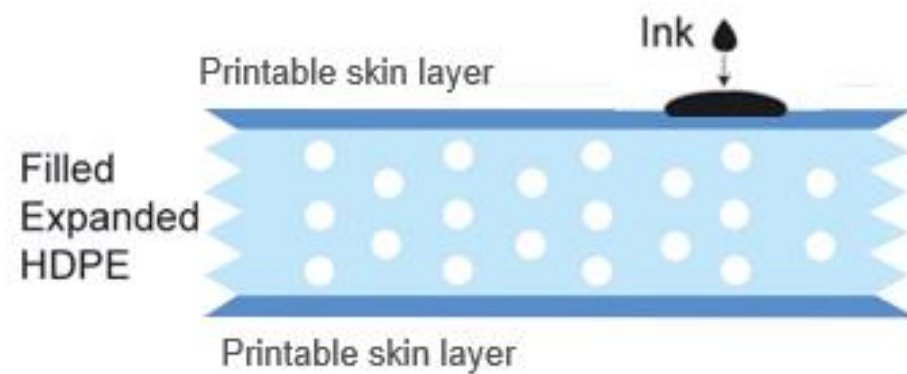

| Property | Method | Units | Typical values |
|-------------------|-------------------------|-------------------------|----------------|
| Thickness | ISO 534: 2011 | Mils | 2.8 |
| | | µm | 71 |
| Weight | ISO 536: 2012 | g/m² | 50 |
| Density | ISO 534: 2011 | g/cm³ | 0.7 |
| Whiteness | TAPPI 1216 SP-12 | % | 87 |
| Opacity | ISO 2471: 2008 | % | 90 |
| Dyne level | ASTM D2578-09 | Dynes/cm | >42 |



FEATURES AND BENEFITS:

- Good thermal transfer printing with a wide range of ribbons
- Good printing by flexo and other conventional printing methods
- Die-cuts well
- No static issues
- High dimensional stability
- Resistant to a wide range of chemicals
- Resistant to a wide temperature variation -60°C / +60°C
- Recyclable as a #2 HDPE

The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, suitability, accuracy, reliability, or completeness of this information or the products, materials, or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage, or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. There is no endorsement of any product or process, and we expressly disclaim any contrary information.